

Applications

 Construction and Demolition
 Grading and Leveling

Landscaping

Main features

 Designed for precise grading.
 Available with a fully-integrated laser ready control system (must also order receiver)
 Operated with switches mounted on the loader's steering levers.

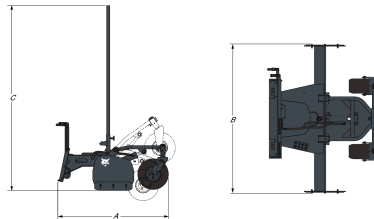
 Reversible cutting edge.
 Grading width of 214 cm.
 Comes standard with foam-filled tires for added flotation.

Compatibility

Description	Item number	Compatible with loader
Box Blade 214 cm	6906574	A770-B, T450E IIIB, T590E IIIB, T590B iT4, T650E iT4, T650B iT4, S510E IIIA, S510B, S530E IIIA, S530B, S550E IIIB, S550B iT4, S570B iT4, S590E IIIB, S590B iT4, S630E iT4, S630B iT4, S650E iT4, S650B iT4, S770E IV, S770E T3, S770B T3, A770E IV, S510E V, S530E V, T590E V, T450E V, S66, S76, T66, T76, S510B, S530B, S550E V, S590E V, S630B iT4, S650B iT4
Box Blade 214 cm with Laser Mounting	6906676	A770-B, T450E IIIB, T590E IIIB, T590B iT4, T650E iT4, T650B iT4, S510E IIIA, S510B, S530E IIIA, S530B, S550E IIIB, S550B iT4, S570B iT4, S590E IIIB, S590B iT4, S630E iT4, S630B iT4, S650E iT4, S650B iT4, S770E IV, S770E T3, S770B T3, A770E IV, S510E V, S530E V, T590E V, T450E V, S66, S76, T66, T76, S510B, S530B, S550E V, S590E V, S630B iT4, S650B iT4

Characteristics and performance

Description	Item number	Blade width fully angled (D) (mm)	Blade Cutting Edge (reversible) (mm)	Grade Accuracy with Laser (mm)
Box Blade 214 cm	6906574	2134.0	12.7 x 152	-
Box Blade 214 cm with Laser Mounting	6906676	2134.0	12.7 x 152	± 6

Weights and dimensions


Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Box Blade 214 cm	6906574	445.0	463.0	1634.0	2140.0	813.0
Box Blade 214 cm with Laser Mounting	6906676	464.0	481.0	1634.0	2140.0	813.0