

### Applications

Agriculture  
Forestry

Landscaping  
Road work, Recycling and Cleaning

### Main features

Double-edge blade provides increased blade life by bi-directional cutter rotation (achieved by switching the hydraulic hoses at the drive motor)  
Direct hydraulic drive dampens impact loads and eliminates the need for shear pins or drive clutches.  
Front rollers allow to better traverse uneven terrain while reducing operator fatigue.  
Flotation linkage allows the deck to float over ground contours, keeping it in contact with the surface for optimum performance.

Patented blade shutoff device stops blade rotation when rotary cutter is raised off the ground.  
Hydraulic pressure gauge (visible from operator seat) allows operator to monitor and maintain optimal carrier travel speed.  
Floating frame allows oscillation +/- 10 degrees


### Compatibility

Description	Item number	Compatible with loader
Brushcat™ Rotary Cutter Standard Flow RC66S	7234049	T450E IIIB, T590E IIIB, T590B iT4, S450E IIIA, S450B T2, S510E IIIA, S510B T2, S530E IIIA, S530B T2, S550E IIIB, S550B iT4, S570E IIIB, S570B iT4, S590E IIIB, S590B iT4
Brushcat™ Rotary Cutter High Flow RC66H	7233014	T590E IIIB, T590B iT4, S550E IIIB, S550B iT4, S570E IIIB, S570B iT4, S590E IIIB, S590B iT4
Brushcat™ Rotary Cutter Standard Flow RC72S	7218087	A770-B, T590E IIIB, T590B iT4, T650E IIIB, T650E iT4, T650B iT4, S510E IIIA, S510B T2, S530E IIIA, S530B T2, S550E IIIB, S550B iT4, S570E IIIB, S570B iT4, S590E IIIB, S590B iT4, S630E IIIB, S630E iT4, S630B iT4, S650E IIIB, S650E iT4, S650B iT4, S770E IV, S770E T3, S770B T3, A770E IV
Brushcat™ Rotary Cutter High Flow RC72H	7233002	A770-B, T590E IIIB, T590B iT4, T650E IIIB, T650E iT4, T650B iT4, S630E IIIB, S630E iT4, S630B iT4, S650E IIIB, S650E iT4, S650B iT4, S770E IV, S770E T3, S770B T3, A770E IV
Brushcat™ Rotary Cutter High Flow RC80H	7233092	A770-B, T650E IIIB, T650E iT4, T650B iT4, T770E IV, T770E T3, T770B T3, T870E IV, T870B T3, S630E IIIB, S630E iT4, S630B iT4, S650E IIIB, S650E iT4, S650B iT4, S770E IV, S770E T3, S770B T3, S850E IV, S850E T3, S850B T3, A770E IV

### Characteristics and performance

Description	Item number	Deck length (mm)	Vertical travel (mm)	Cutting width (mm)	Cutting height (mm)	Flow range (L/min)	Blade tip speed
Brushcat™ Rotary Cutter Standard Flow RC66S	7234049	1551.9	203.2	1676.0	76.2	57.0-91.0	57.9 m/sec. @ 57 l/min, 92.6 m/sec. @ 91 l/min
Brushcat™ Rotary Cutter High Flow RC66H	7233014	1551.9	203.2	1676.0	76.2	91.0-136.0	57.9 m/sec. @ 91 l/min, 86.8 m/sec. @ 136 l/min
Brushcat™ Rotary Cutter Standard Flow RC72S	7218087	1633.2	203.2	1829.0	76.2	57.0-98.0	50.4 m/sec. @ 57 l/min, 87.4 m/sec. @ 98 l/min
Brushcat™ Rotary Cutter High Flow RC72H	7233002	1633.2	203.2	1829.0	76.2	91.0-121.0	50.4 m/sec. @ 91 l/min, 84 m/sec. @ 121 l/min
Brushcat™ Rotary Cutter High Flow RC80H	7233092	1719.6	203.2	2032.0	76.2	91.0-151.0	55.5 m/sec. @ 91 l/min, 92.5 m/sec. @ 151 l/min

### Weights and dimensions

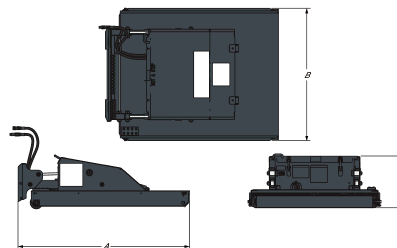

Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Brushcat™ Rotary Cutter Standard Flow RC66S	7234049	652.0	652.0	1706.9	1785.6	673.1
Brushcat™ Rotary Cutter High Flow RC66H	7233014	652.0	652.0	1706.9	1785.6	673.1
Brushcat™ Rotary Cutter Standard Flow RC72S	7218087	680.0	680.0	1788.2	1938.0	673.1

## Brushcat™ Rotary Cutters

## Attachments Specifications

Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Brushcat™ Rotary Cutter High Flow RC72H	7233002	680.0	680.0	1788.2	1938.0	673.1
Brushcat™ Rotary Cutter High Flow RC80H	7233092	717.0	717.0	1874.5	2141.2	673.1