

Applications

 Agriculture
 Construction and Demolition

 Grading and Leveling
 Landscaping

Main features

 Connects as an interface between the Bob-Tach™ and attachment. ¹
 Rotates right or left 15 degrees from center.
 Hydraulically controlled from loader seat.

 Keeps load level on uneven terrain.
 Cuts level path out of sidehill.
 Digs drainage ditches with the corner of the bucket.

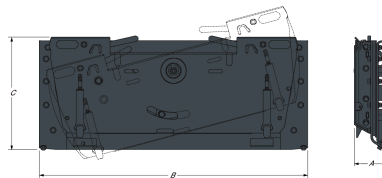
1. Note: Use of Tilt-Tatch™ will reduce operating capacity and tip load by approximately 20%. See the Tilt-Tatch™ Operators Manual for New Load Ratings. Note: Tilt-Tatch™ can be used with non-hydraulic attachments only. • Digs drainage ditches with the corner of the bucket.

Compatibility

Description	Item number	Compatible with loader
Tilt-Tatch	7101600	T450E IIIB, T590E IIIB, T590B iT4, S450E IIIA, S450B T2, S510E IIIA, S510B T2, S530E IIIA, S530B T2, S550E IIIB, S550B iT4, S570E IIIB, S570B iT4, S590E IIIB, S590B iT4, S630E IIIB, S630E iT4, S630B iT4, S650E IIIB, S650E iT4, S650B iT4

Characteristics and Performance

Description	Item number	Rotation ± (°)
Tilt-Tatch	7101600	15.0

Weights and dimensions


Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Tilt-Tatch	7101600	145.0	145.0	109.0	1219.0	518.0