

**Machine Rating**

Rated operating capacity (ISO 14397-1)	869 kg
Tipping load (ISO 14397-1):	1737 kg
Pump capacity	64.70 L/min
Pump capacity (with high flow option)	101.10 L/min
System relief at quick couplers	23.8-24.5 MPa
Max. travel speed (high range - option)	17.3 km/h
Max. travel speed (low range)	11.8 km/h

**Engine**

Make / Model	Kubota / V2203-M-DI-E2B-BC-3
Fuel	Diesel
Cooling	Liquid
Power at 2800 RPM (SAE J1995):	36.4 kW
Torque at 1425 RPM (SAE J1995 Gross)	150.0 Nm
Number of cylinders	4
Displacement	2196 cm <sup>3</sup>
Fuel tank	93.70 L

**Weights**

Operating weight	2815 kg
Shipping weight	2476 kg

**Controls**

Vehicle steering	Direction and speed controlled by two hand levers or optional Advanced Control System (ACS), Advanced Hand Controls (AHC) or Selectable Joystick Controls (SJC)
Loader hydraulics tilt and lift	Separate foot pedals or optional Advanced Control System (ACS), Advanced Hand Controls (AHC) or Selectable Joystick Controls (SJC)
Front auxiliary (standard)	Electrical switch on right-hand steering lever

**Drive System**

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

**Standard Features**

Cushion suspension seat	Lift arm support
Automatically activated glow plugs	Noise reduction kit
Auxiliary hydraulics: variable flow/maximum flow	Work lights, front and rear
Bob-Tach™ frame	Parking brake
Bobcat Interlock Control System (BICS)	Seat belt
Deluxe operator cab with windows <sup>1</sup>	Seat bar
Electrically activated proportional front auxiliary hydraulics	Spark arrestor muffler
Engine/hydraulics system shutdown	10 x 16.5, 10-ply, Heavy duty tyres
Hydraulic bucket positioning (including ON/OFF switch)	CE certification
Instrumentation	Warranty: 12 months or 2000 hours (whichever occurs first)

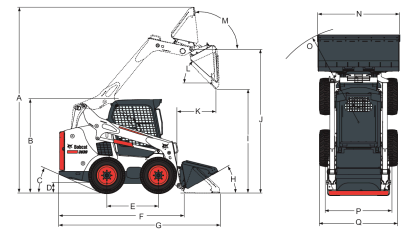
1. Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471; Falling Object Protective Structure (FOPS) - meets requirements of SAE-J1043 and ISO 3449, Level I

**Options**

High-Flow hydraulics	Selectable Joystick Controls (SJC)
Deluxe instrument panel	Two speed
Power Bob-Tach™	Air ride seat with 2 point seat belt
Cab enclosure with heating	Back-up alarm
10 x 16.5, 10-ply, Heavy duty tyres, offset rims	Beacon
10 x 16.5, 10-ply, Severe duty tyres	Engine block heater
12 x 16.5, 12-ply, Severe duty tyres, poly filled	Fire extinguisher
12 x 16.5, Solid flex tyres	Radio
31 x 12-16.5, 10-ply, Superflotation tyres	Road kit
Advanced Control System (ACS)	Strobe
Advanced Hand Controls (AHC)	

**Environmental**

Fuel consumption at 100% engine load	10.60 L/min
Fuel consumption at 70% engine load	8.70 L/min
Fuel consumption at 50% engine load	7.60 L/min
Fuel consumption at 30% engine load	7.20 L/min

**Dimensions**


(A)	3901.0 mm	(J)	3023.0 mm
(B)	1972.0 mm	(K)	828.0 mm
(C)	24.2°	(L)	42.0°
(D)	185.0 mm	(M)	97.0°
(E)	1082.0 mm	(N)	1727.0 mm
(F)	2657.0 mm	(O)	2024.0 mm
(G)	3378.0 mm	(P)	1374.0 mm
(H)	30.0°	(Q)	1643.0 mm
(I)	2319.0 mm		

**Attachments**

Angle Brooms	Pallet Fork Accessories
Auger Accessories	Pallet Forks, Hydraulic
Augers	Planer Accessories
Backhoes	Planers
Bale Forks	Root Grapples
Box Blades	Scarifiers
Breaker Accessories	Scrapers
Breakers	Skeleton Buckets
Brushcat™ Rotary Cutters	Snow & Light Material Buckets
Brush Saws	Snow Blades
Combination Buckets	Snow Pushers
Concrete Mixers	Snow V-Blades
Construction / Industrial Buckets	Sod Layers
Diggers	Soil Conditioners
Dozer Blades	Spreaders
Drop Hammers	Steel Tracks
Dumping Hoppers	Stump Grinders
Fertilizer and Grain Buckets	Sweepers
Flail Cutters	Tillers
General Purpose (GP)	Tilt-Tatch
Bucket	Tree Transplanters
Graders	Trench Compactors
Grapples, Industrial	Trenchers
Landplanes	Utility Forks
Landscape Rakes	Vibratory Rollers
Laser Equipment	Wheel Saws
Low Profile Buckets	Whisker Brooms
Miscellaneous	Wood Chippers
Mixing Buckets	
Mowers	