

**Performance**

Tipping load (ISO 14397-1)	3515 kg
Rated operating capacity (ISO 14397-1)	1850 kg
Pump capacity	87.10 L/min
Pump capacity (with high flow option)	138.50 L/min
System relief at quick couplers	23.8-24.5 MPa
Max. travel speed (high range)	19.8 km/h
Max. travel speed (low range)	11.4 km/h

**Engine**

Make / Model	Kubota / V3800-DI-T-E3
Fuel	Diesel
Cooling	Liquid
Maximum power at 2400 RPM (SAE J1995)	68.6 kW
Torque at 1600 RPM (SAE J1995 Gross)	315.0 Nm
Number of cylinders	4
Displacement	3769 cm <sup>3</sup>
Fuel tank	111.60 L

**Weights**

Operating weight	4540 kg
Shipping weight	4254 kg

**Controls**

Vehicle steering	Direction and speed controlled by two hand levers
Loader hydraulics tilt and lift	Selectable Joystick Control (SJC)
Front auxiliary (standard)	Electrical switch on right-hand steering lever

**Drive System**

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

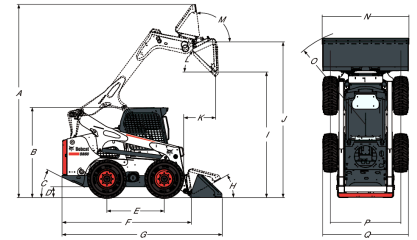
**Standard Features**

Two-speed travel	Manual
Selectable Joystick Controls (SJC) or Standard Control	Lift arm support
Power Assist (SCPA)	Work lights, front and rear
High-back adjustable suspension seat	Parking brake
Automatically activated air intake heater	Seat belt
Auxiliary hydraulics: variable flow/maximum flow	Seat bar
Bob-Tach™ frame	14 x 17.5, 12-ply, Bobcat heavy duty tyres
Bobcat Interlock Control System (BICS)	Turbo-charger with approved spark arrestor
Deluxe operator cab <sup>1</sup>	Warranty: 24 months or 2000 hours (whichever occurs first)
Electrically activated proportional front auxiliary hydraulics	
Engine/hydraulics system shutdown	

1. Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471; Falling Object Protective Structure (FOPS) - meets requirements of SAE-J1043 and ISO 3449, Level I

**Options**

Heavy duty radio	14 x 17.5, Solid flex tyres
High-Flow hydraulics	Air ride seat with 3 point seat belt
Deluxe instrument panel	Back-up alarm
Deluxe pressurized cab with heating	Beacon
Air conditioning	Engine block heater
Power Bob-Tach™	Fire extinguisher
12 x 16.5, 12-ply, Bobcat heavy duty tyres, offset rims	Strobe
14 x 17.5, 12-ply, Severe duty tyres, poly filled	

**Dimensions**


(A)	4532.0 mm	(J)	3657.0 mm
(B)	2118.0 mm	(K)	754.0 mm
(C)	27.0°	(L)	42.0°
(D)	218.0 mm	(M)	98.0°
(E)	1342.0 mm	(N)	2032.0 mm
(F)	3030.0 mm	(O)	2262.0 mm
(G)	3751.0 mm	(P)	1652.0 mm
(H)	30.0°	(Q)	2005.0 mm
(I)	2951.0 mm		

**Attachments**

Angle Brooms	Mowers
Auger Accessories	Pallet Fork Accessories
Augers	Pallet Forks, Hydraulic
Backhoes	Planer Accessories
Bale Forks	Planers
Breaker Accessories	Root Grapples
Breakers	Rotary Grinders
Brushcat™ Rotary Cutters	Silt Fence Installers
Brush Saws	Skeleton Buckets
Concrete Pumps	Snow & Light Material Buckets
Construction / Industrial Buckets	Snow Blades
Dozer Blades	Snow Pushers
Drop Hammers	Sod Layers
Dumping Hoppers	Soil Conditioners
Flail Cutters	Spreaders
Forestry Cutters	Steel Tracks
Graders	Stump Grinders
Grapples, Industrial	Tree Transplanters
Landplanes	Trench Compactors
Landscape Rakes	Utility Frames
Laser Equipment	Vibratory Rollers
Miscellaneous	Wheel Saws
Mixing Buckets	Wood Chippers