

### Applications

Agriculture  
Forestry

Landscaping

### Main features

The work group is mounted at an angle of 90 degrees to the operator for excellent visibility to the cutting area, giving the operator the same wide view as a pull-behind stump grinder. The swing cylinder design generates an impressive arc. This allows the operator to cut large stumps without repositioning. Rubber deflector shields and screening provide additional operator comfort and protection from wood chips.

The unique valve design controls the swing circuit speed to prevent the cutting wheel from stalling in the cut. Diverse cutting heights gives better access for a variety of size stumps.


### Compatibility

Description	Item number	Compatible with loader
Stump Grinder SG30	7100641	MT55E, S70E, S70E
Stump Grinder SG60	6808034	A770-B, T590E IIIB, T590B iT4, T650E IIIB, T650E iT4, T650B iT4, T770E IV, T770E T3, T770B T3, T870E IV, T870B T3, S510E IIIA, S510B T2, S530E IIIA, S530B T2, S550E IIIB, S550B iT4, S570E IIIB, S570B iT4, S590E IIIB, S590B iT4, S630E IIIB, S630E iT4, S630B iT4, S650E IIIB, S650E iT4, S650B iT4, S770E IV, S770E T3, S770B T3, S850E IV, S850E T3, S850B T3, A770E IV
Stump Grinder SGX60 High Flow	7112201	A770-B, T590E IIIB, T590B iT4, T650E IIIB, T650E iT4, T650B iT4, T770E IV, T770E T3, T770B T3, T870E IV, T870B T3, S530E IIIA, S530B T2, S550E IIIB, S550B iT4, S570E IIIB, S570B iT4, S590E IIIB, S590B iT4, S630E IIIB, S630E iT4, S630B iT4, S650E IIIB, S650E iT4, S650B iT4, S770E IV, S770E T3, S770B T3, S850E IV, S850E T3, S850B T3, A770E IV

### Characteristics and performance

Description	Item number	Max cutting height (mm) (mm)	Max cutting depth (mm)	Max cutting angle (°)	Grinder reach at ground level (mm)	Wheel diameter (mm)	Number of teeth	Required flow (l/min) (L/min)
Stump Grinder SG30	7100641	279.0	279.0	90.0	1175.0	457.0	16	38.0-53.0
Stump Grinder SG60	6808034	806.0	381.0	80.0	1880.0	686.0	32	64.0-121.0
Stump Grinder SGX60 High Flow	7112201	806.0	381.0	80.0	1880.0	686.0	32	95.0-151.0

### Weights and dimensions

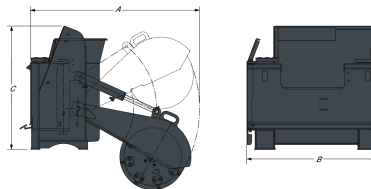

Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Stump Grinder SG30	7100641	171.0	171.0	1175.0	914.0	851.0
Stump Grinder SG60	6808034	445.0	445.0	2012.0	1670.0	1509.0
Stump Grinder SGX60 High Flow	7112201	451.0	451.0	2012.0	1676.0	1509.0